

# FR1500

## Flush-Mounted RS-485 Fingerprint Reader



### Features

---

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- SilkID Fingerprint Sensor and Support Live Finger Detecting.
- Stainless Steel Front casing.
- Optional Fingerprint Protective Cover.

# Specifications

## Additional Info

Working Temperature: 0 °C ~ 45 °C  
 Working Humidity: 20 ~ 80%  
 Dimensions(LxWxH): 121.3 × 77.3 × 38 mm  
 Algorithm: ZKFinger v10.0

## Power Supply

Operating Voltage 12V DC  
 Stand-by Mode Power Consumption:12V\*60mA=0.72W  
 Peak Current of Fingerprint scanning:140mA

## Hardware

1.0 GHz CPU  
 ZKSilkID Sensor  
 Buzzer Prompt  
 Three-color Indicator Light

## Compatibility

inBio/inBioPro Controllers  
 Standalone Fingerprint Devices

## Standard Features

125KHz RFID Card


## Optional Features

125KHz HID Prox Card  
 13.56MHz MifareCard(S50 / S70)  
 13.56MHz HID Iclass Card  
 13.56MHz Felica Card


## Communication

RS485

# Configuration

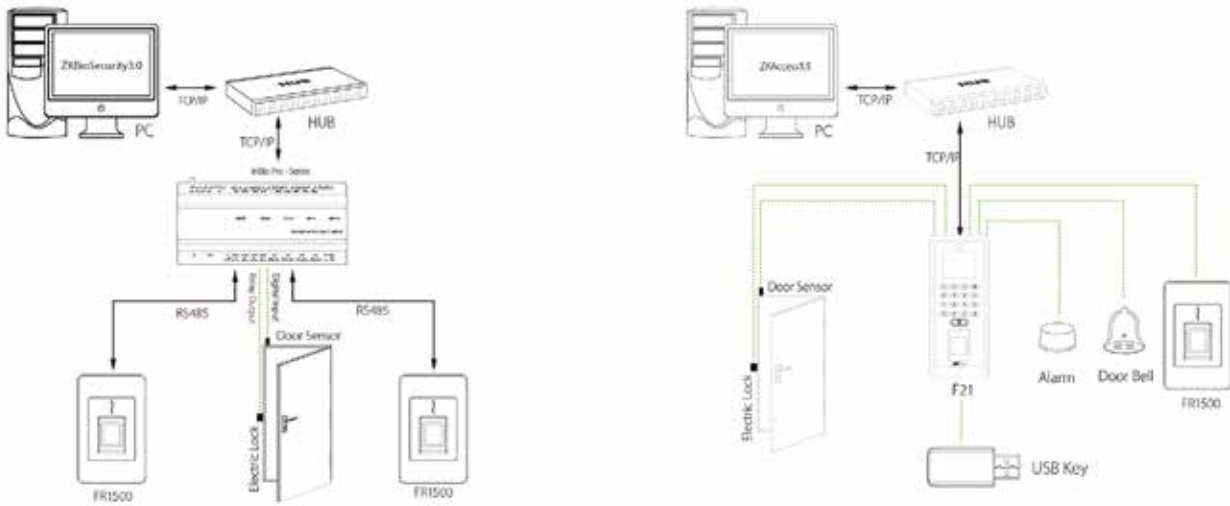

# Dimensions (mm)

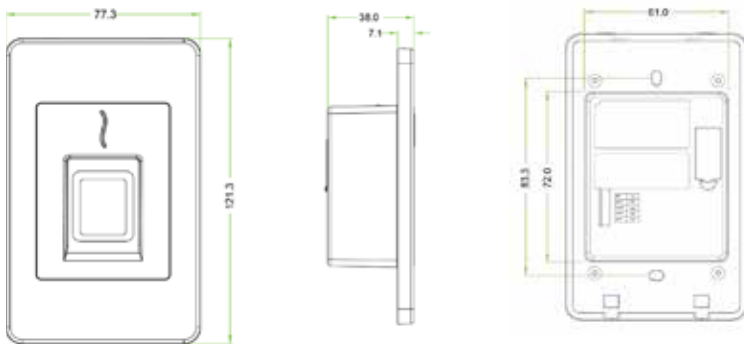

## MySolutions Inc.

Authorized Distributor of ZKTeco Products in the Philippines  
 2F 201 Del Monte Ave. Brgy. Masambong QC  
 Tel: (02) 8-365-8488 | (02) 8-367-8188  
 (02) 8-257-7696 to 99  
 Email: sales@mysolutions.ph